
## SPECIFICATIONS FOR PARKING STALLS AND STRUCTURES

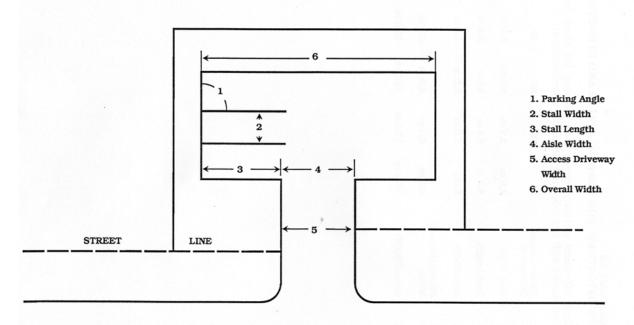

EDGE OF TRAVELLED PORTION OF THE STREET

Each off-street parking space and parking lot shall be provided in accordance with the following minimum specifications:

1. Parking Angle	90	75	60	45	Parallel
2. Stall Width	2.7m	2.7m	2.7m	2.7m	2.7m
3. Stall Length	6 m	6 m	6 m	6 m	6.5 m
4. Aisle Width	6 m	6 m	5 m	4 m	5 m
5. Access Drive Width	7.5m min 9m max	7.5m min 9m max	7.5m min 9m max	7.5m min 9m max	7.5m min 9m max
6. Overall Width	18m	18m	17m	16m	11m
7. Access Drive Width in C2A, CMU-2 and CMU-4 Less than 5 Spaces	3m	3m	3m	3m	3m
8. Access Drive Width in C2A, CMU-2 and CMU-4 Less than 10 Spaces	4.5m	4.5m	4.5m	4.5m	4.5m
9. Access Drive Width in C2A, CMU-2 and CMU-4 more than 10 Spaces	6m	6m	6m	6m	6m